


ISUZU 'FORWARD' F110.210

11.00T GVW

(Manual transmission) 4x2 rigid

EURO VI

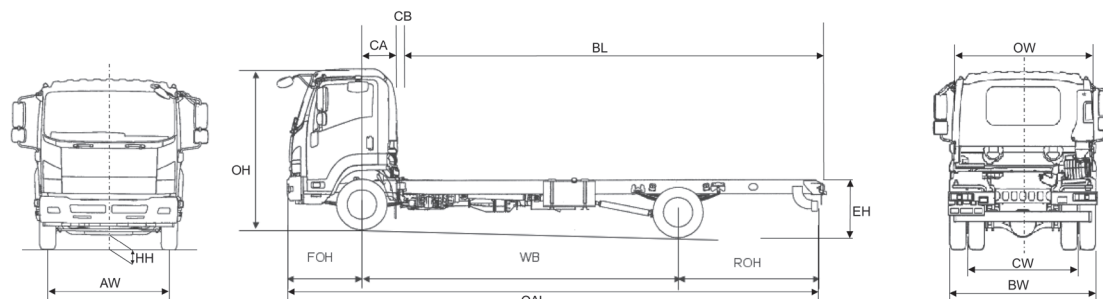

UK Standard vehicle plated weights (kg)

GVW	11000
GTW	14500

UK Axle design weights (kg)

Front	4000
Rear	7600

Weights (kg)

Cab type		day	day	day
Wheelbase	WB	4060	4660	4990
Vehicle Mass Unladen	Front	2270	2290	2310
	Rear	1210	1230	1250
Total		3480	3520	3560
GVW		11000	11000	11000
Max. Permissible Trailer Weight		3500	3500	3500
Body & Payload Allowance		7520	7480	7440

Dimensions (mm)

Overall Length	OAL	7000	7900	8350
Overhang - Front	FOH	1170	1170	1170
Overhang - Rear	ROH	1770	2070	2190
Cab Gap	CB	150	150	150
C/L Front Axle to Rear of Cab	CA	556	556	556
Recommended Body Length	BL	5468	6368	6818
Chassis Frame Width		840	840	840
Recommended Body Width		2550	2550	2550
Recommended Maximum Body Width		2600*	2600*	2600*
Cab Width	OW	2200	2200	2200
Overall Height (Unladen)	OH	2510	2510	2505
Chassis Height (Unladen)	EH	875	930	930
Minimum Road Clearance	HH	165	165	165
Track - Front	AW	1795	1795	1795
Track - Rear	CW	1660	1660	1660
Rear Axle Width	BW	2170	2170	2170

*Max dimension for refrigerated bodies only

1. Unladen weights excludes driver, fuel, Ad Blue. Includes spare wheel + carrier (Tolerance $\pm 3\%$).
2. Body lengths are given as a guide only. Bodybuilders are responsible for ensuring all legal requirements are met.
3. Maximum body lengths are calculated to remain within the maximum permitted overhang in the UK of 60% of the wheelbase. Cab gaps may vary.
4. Isuzu Truck (UK) Ltd. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

ISUZU 'FORWARD' F110.210

11.00T GVW

(Manual transmission) 4x2 rigid

EURO VI



Mechanical Specification (standard equipment)

Engine 4HK1E6S

Isuzu turbo intercooled
OHC 4 cylinder diesel
(Euro VI)

Bore: 115mm

Stroke: 125mm

Capacity: 5193cc

Max Power: 154kW

(210 PS) at 2400rpm

Max Torque: 706Nm at
1600rpm

Injection Type: Common
rail

Euro VI Compliance:

EGR (Exhaust Gas

Recirculation) with

DPD (Diesel Particulate

Diffuser) SCR Adblue and

OBD

Fuel Tank

Capacity: 140 litres

Ad Blue: 16 litres

Transmission

6 speed Isuzu Manual

MZW6P gearbox

Ratios: 1st 6.615

2nd 4.095

3rd 2.358

4th 1.531

5th 1.000

6th 0.722

reverse 6.615

Rear Axle Ratio: 4.555:1

Tyres: 235/75 17.5 radial

Wheels: Steel 17.5 x 6.75,

6-stud

Cab Exterior

Aerodynamic Isuzu

Hexapod design white
all steel with roof outline
markers

Tilt to 45 deg.

Keyless door entry and
immobiliser

Laminated windscreen

Non-slip entry steps

90 deg. opening doors

Zinc galvanised frame
structure

2 halogen headlamp units
with indicators

Front mudguards with
spray suppression

All-steel front bumper
with fog and daytime

running lamps

Chrome radiator grille

Aluminium rear bumper

Frame

Parallel ladder type
channel section

Cooling

Tube and fin type
radiator with fan and
viscous clutch

Frame mounted fuel
cooler

Clutch

Automatically adjusted,
air assisted 356mm
diameter

Cab Interior

Flame-resistant interior
trim

Vinyl floor matting

Dual long grab handles
each side

SRS airbags driver and
passenger

Header console storage

Interior fluorescent
lighting

Seats (all cloth)

Driver's adjustable

air-suspended seat

with head restraint and

3-point seat belt with pre-

tensioner

Rigid centre seat with

2-point seatbelt

Rigid passenger seat

with head restraint and

3-point seat belt pre-

tensioner

Vision

Large door mounted

heated mirrors

Front underview mirror

and kerb mirror

Driver and passenger sun

visors

Deep cut side windows to

reduce blind spots

Electric windows with

driver control and lock

with indicators

Heating & Ventilation

4-Speed blower

Multiple cab vents

Axles

Front: Reverse Elliott

I-Beam

Rear: Banjo type, fully

floating

Suspension

Front: Multi Taper-leaf
steel springs

Rear: Multi Taper-leaf
steel springs with helper

Steering

Recirculating ball type
with full integral hydraulic
power assistance

Tilt and telescopic

steering column

Brakes

System: ABS air over

hydraulic, dual circuit

with anti-slip regulation,

Front: Drum 320mm x

120mm

Rear: Drum 320mm x

145mm

Park: Rear Wheel

Air dryer

Instruments

Rev counter

Tachograph, digital

Siemens VDO

Speedometer with

odometer and trip

Multi-information

display provides data on

servicing emissions and

fuel economy

Gauges: Fuel level,

coolant temperature and

air pressure

Switches & Electrical

Electrical vehicle speed

limiter set at 56mph

(90kph) with automatic

cruise control

Steering column mounted

switch for indicators, side

lights, headlights, high

beam, front and rear fog

lamps

Wiper and washer

(2-speed and

intermittent)

Exhaust brake

Brake warning buzzer

Steering wheel horn

Hazard lights

Headlamp levelling

Interior light

Key operation for quick

cold start, start and stop

Cigarette lighter

Central locking

Reverse warning

DPD engage

Engine idle control

Heated mirrors

Engine quick warm-up

ASR off

Heater stage

Warning /Indicator Lamps

Battery charge

Oil pressure

Brake system

Low fuel

Glow plug operation

High beam indicators

Parking brake on

Exhaust brake operation

Fuel/water separator

Check engine

ABS

SVS

DPD operation

OBD

Front and rear fog

Air pressure warning

Engine over heat

Adblue level

Seat belt

SRS air bag

Tool Kit

Jack with a small

selection of hand tools

Radio

Radio with CD player

Storage Space

Centre seat back

compartment

Door pockets

Twin overhead lockers

Centre tray

Dashboard pockets

Card holder

Ancillaries


Starter: 24 V x 4.5kW

Alternator: 24 V - 90 Amp

Quick Start: 4 glow plugs

on start relay

Battery: 2 x 12 V - 115 AH



The following optional items are available:

- Isuzu Branded Mats
- Aerodynamic Body Kits
- Satellite Navigation
- Reversing Aids
- PTO Switch
- Telematics

For further information
please contact your local
dealer, ring us directly on

01707 28 29 30

or visit our website

www.isuzutruck.co.uk

Isuzu Truck (UK) Ltd,
Isuzu House, 164 Great
North Road, Hatfield,
Hertfordshire AL9 5JN

ISUZU